

An introduction to **RLassoCox**

Wei Liu

freelw@qq.com

Heilongjiang Institute of Technology

July 3, 2024

1 Introduction

RLassoCox is a package that implements the RLasso-Cox model proposed by Wei Liu. The RLasso-Cox model integrates gene interaction information into the Lasso-Cox model for accurate survival prediction and survival biomarker discovery. It is based on the hypothesis that topologically important genes in the gene interaction network tend to have stable expression changes. The RLasso-Cox model uses random walk to evaluate the topological weight of genes, and then highlights topologically important genes to improve the generalization ability of the Lasso-Cox model. The RLasso-Cox model has the advantage of identifying small gene sets with high prognostic performance on independent datasets, which may play an important role in identifying robust survival biomarkers for various cancer types.

RLassoCox solves the following problem

$$\max_{\beta} \sum_{i=1}^m \left(x_{j(i)}^T \beta - \log \left(\sum_{j \in R_i} e^{x_j^T \beta} \right) \right) - \lambda \sum_{k=1}^p \varphi(w_k) |\beta_k| \quad (1)$$

over a grid of values of λ . Here the first term represents the log partial likelihood function, and the second term is a topologically weighted L_1 -norm constraint.

2 Installation

Like many other R packages, the simplest way to obtain **RLassoCox** is to install it directly from Bioconductor. Type the following command in R console:

```
# if (!requireNamespace("BiocManager", quietly = TRUE))
#   install.packages("BiocManager")
# BiocManager::install("RLassoCox")
```

3 **RLassoCox**

In this section, we will go over the main functions, see the basic operations and have a look at the outputs. Users may have a better idea after this section what functions are available, which one to choose, or at least where to seek help.

First, we load the **RLassoCox** package:

```
library("RLassoCox")

## Loading required package: glmnet
## Loading required package: Matrix
## Loaded glmnet 4.1-8
```

The R`LassoCox` package trains the R`Lasso-Cox` model based on gene expression profiles, survival information and gene interaction networks. We load a set of data created beforehand for illustration. Users can either load their own data or use those saved in the workspace.

```
data(mRNA_matrix) # gene expression profiles
data(survData)    # survival information
data(dGMMirGraph) # gene interaction network
```

The commands load an input gene expression matrix `mRNA_matrix`, a data frame `survData` that contains survival information, and an `igraph` object `survData` that contains the KEGG network constructed by the R package `iSubpathwayMiner`.

`survData` is an $n \times 2$ matrix, with a column "time" of failure/censoring times, and "status" a 0/1 indicator, with 1 meaning the time is a failure time, and zero a censoring time.

```
head(survData)

##           status time
## TCGA-02-0001  TRUE  358
## TCGA-02-0003  TRUE  144
## TCGA-02-0006  TRUE  558
## TCGA-02-0007  TRUE  705
## TCGA-02-0009  TRUE  322
## TCGA-02-0010  TRUE 1077
```

In order to train and test the predictive performance of the R`Lasso-Cox` model, we divide the data set into a training set and a test set.

```
set.seed(20150122)
train.Idx <- sample(1:dim(mRNA_matrix)[1], floor(2/3*dim(mRNA_matrix)[1]))
test.Idx  <- setdiff(1:dim(mRNA_matrix)[1], train.Idx)
x.train  <- mRNA_matrix[train.Idx,]
x.test   <- mRNA_matrix[test.Idx,]
y.train  <- survData[train.Idx,]
y.test   <- survData[test.Idx,]
```

Train the R`Lasso-Cox` model based on the training set data:

```
mod <- RLassoCox(x=x.train, y=y.train, globalGraph=dGMMirGraph)

## This graph was created by an old(er) igraph version.
## Call upgrade_graph() on it to use with the current igraph version
## For now we convert it on the fly...

## Calculating Cox p-value...Done
## Performing directed random walk...Done
```

The `RLassoCox` function depends on the `glmnet` package[1]. `mod` contains a list object that includes a `glmnet` object `glmnetRes` and a topological weight vector `PT`. `PT` is the topological weights of the genes.


```
head(mod$PT)

##           7010           1261           10209           22798           2526           10965
## 0.0007118464 0.0004399878 0.0008614412 0.0012176743 0.0004669061 0.0004577181
```

`glmnetRes` contains all the relevant information of the fitted model for further use. We can use the `plot`, `print`, `coef` and `predict` functions in the `glmnet` package to easily extract the components of the model.

We can visualize the coefficients by executing the `plot` function:

```
plot(mod$glmnetRes)
```

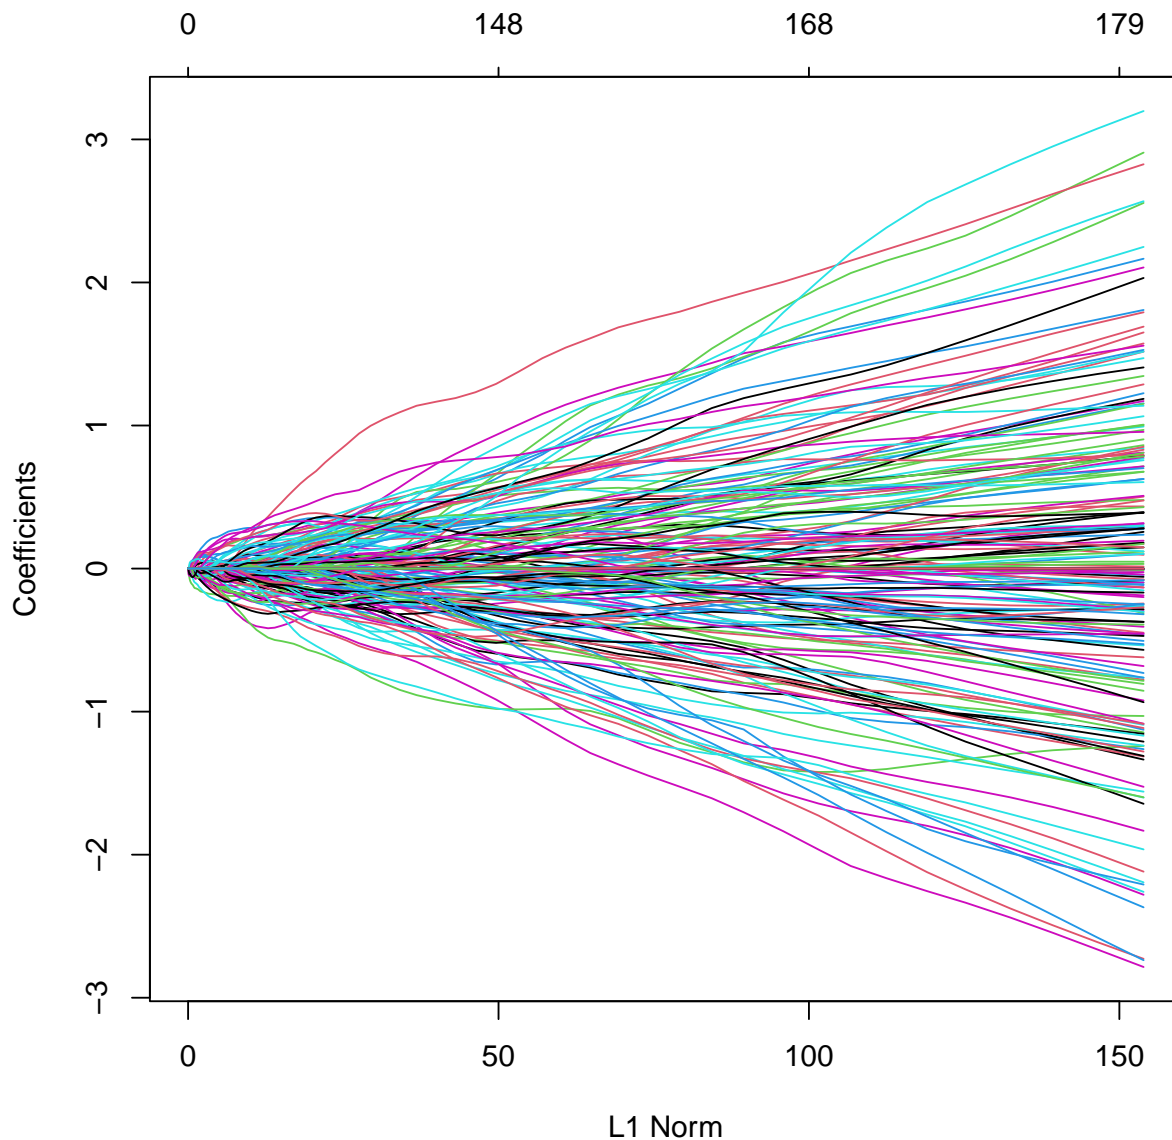

Each curve in the figure corresponds to a variable (gene). It shows the path of the coefficient of each gene and L_1 -norm when λ varies. The axis above indicates the number of nonzero coefficients at the current λ , which is the effective degrees of freedom for the R`LassoCox` model.

A summary of the **R`LassoCox`** path at each step is displayed if we just enter the object name or use the print function:

```
print(mod$glmnetRes)
```

```
##  
## Call: glmnet(x = x, y = Surv(time = y[, "time"], event = y[, "status"]), family = "cox", alpha  
##  
##      Df %Dev Lambda  
## 1      0  0.00 1.57600
```

## 2	2	0.13	1.50400
## 3	2	0.26	1.43600
## 4	3	0.40	1.37000
## 5	4	0.55	1.30800
## 6	5	0.69	1.24900
## 7	5	0.83	1.19200
## 8	5	0.96	1.13800
## 9	6	1.08	1.08600
## 10	6	1.20	1.03700
## 11	6	1.31	0.98960
## 12	7	1.44	0.94460
## 13	8	1.57	0.90170
## 14	9	1.71	0.86070
## 15	11	1.85	0.82160
## 16	12	2.02	0.78420
## 17	12	2.20	0.74860
## 18	13	2.36	0.71450
## 19	13	2.52	0.68210
## 20	14	2.67	0.65110
## 21	16	2.84	0.62150
## 22	17	3.04	0.59320
## 23	17	3.24	0.56630
## 24	18	3.42	0.54050
## 25	20	3.59	0.51600
## 26	21	3.76	0.49250
## 27	22	3.94	0.47010
## 28	24	4.15	0.44880
## 29	25	4.39	0.42840
## 30	27	4.64	0.40890
## 31	29	4.89	0.39030
## 32	28	5.11	0.37260
## 33	28	5.30	0.35560
## 34	29	5.48	0.33950
## 35	30	5.65	0.32400
## 36	29	5.83	0.30930
## 37	29	5.99	0.29520
## 38	31	6.15	0.28180
## 39	31	6.34	0.26900
## 40	36	6.52	0.25680
## 41	39	6.84	0.24510
## 42	43	7.28	0.23400
## 43	45	7.70	0.22330
## 44	48	8.12	0.21320
## 45	51	8.55	0.20350
## 46	55	9.02	0.19430
## 47	59	9.51	0.18540
## 48	61	10.00	0.17700
## 49	62	10.47	0.16900
## 50	61	10.96	0.16130
## 51	65	11.45	0.15390
## 52	67	11.95	0.14690
## 53	71	12.45	0.14030
## 54	75	13.02	0.13390
## 55	80	13.63	0.12780

```

## 56 81 14.20 0.12200
## 57 83 14.75 0.11650
## 58 87 15.30 0.11120
## 59 90 15.88 0.10610
## 60 97 16.50 0.10130
## 61 101 17.18 0.09668
## 62 104 17.89 0.09229
## 63 107 18.65 0.08809
## 64 106 19.37 0.08409
## 65 108 20.01 0.08027
## 66 113 20.64 0.07662
## 67 116 21.30 0.07314
## 68 117 21.96 0.06981
## 69 118 22.67 0.06664
## 70 120 23.44 0.06361
## 71 127 24.26 0.06072
## 72 135 25.16 0.05796
## 73 134 26.10 0.05532
## 74 137 26.93 0.05281
## 75 139 27.85 0.05041
## 76 141 28.83 0.04812
## 77 143 29.87 0.04593
## 78 148 31.09 0.04384
## 79 148 32.22 0.04185
## 80 147 33.31 0.03995
## 81 151 34.37 0.03813
## 82 148 35.42 0.03640
## 83 152 36.52 0.03475
## 84 152 37.54 0.03317
## 85 154 38.56 0.03166
## 86 158 39.65 0.03022
## 87 159 40.76 0.02885
## 88 159 41.89 0.02754
## 89 163 42.99 0.02628
## 90 163 44.04 0.02509
## 91 163 45.27 0.02395
## 92 168 46.38 0.02286
## 93 168 47.35 0.02182
## 94 171 48.38 0.02083
## 95 175 49.50 0.01988
## 96 176 50.52 0.01898
## 97 178 51.67 0.01812
## 98 178 52.72 0.01729
## 99 177 53.76 0.01651
## 100 179 54.78 0.01576

```

The first column **df** represents the number of non-zero coefficients, the second column **%Dev** represents the percent (of null) deviance explained, and the third column **Lambda** represents the value of λ .

The actual coefficients of genes at one or more λ s within the range of the sequence can be obtained:

```

head(coef(mod$glmnetRes, s = 0.2))
## 6 x 1 sparse Matrix of class "dgCMatrix"
##          1

```

```
## 7010 .
## 1261 .
## 10209 0.04169522
## 22798 .
## 2526 .
## 10965 .
```

The **glmnetRes** model can be used to predict the risk of new patients at one or more λ s.

```
lp <- predict(object = mod, newx = x.test, s = c(0.1, 0.2))
head(lp)

##           1           2
## TCGA-02-0003  0.6575433  0.5633245
## TCGA-02-0011 -2.0901828 -1.0954352
## TCGA-02-0014 -0.7554994 -0.9513547
## TCGA-02-0024 -0.2260848 -0.5894672
## TCGA-02-0055  0.9075345  0.1954023
## TCGA-02-0060 -0.6100948 -0.6059411
```


The function **cvRLassoCox** can be used to compute k-fold cross-validation for the RLasso-Cox model.

```
cv.mod <- cvRLassoCox(x=x.train, y=y.train,
                     globalGraph=dGMMirGraph, nolds = 5)

## Calculating Cox p-value...Done
## Performing directed random walk...Done
## Performing cv.glmnet...Done
```

The **cvRLassoCox** function also returns a list object that contains a **cv.glmnet** object **glmnetRes** and a topological weight vector **PT**. In addition, the optimal λ value and a cross validated error plot can be obtained to help evaluate our model.

```
plot(cv.mod$glmnetRes, xlab = "log(lambda)")
```

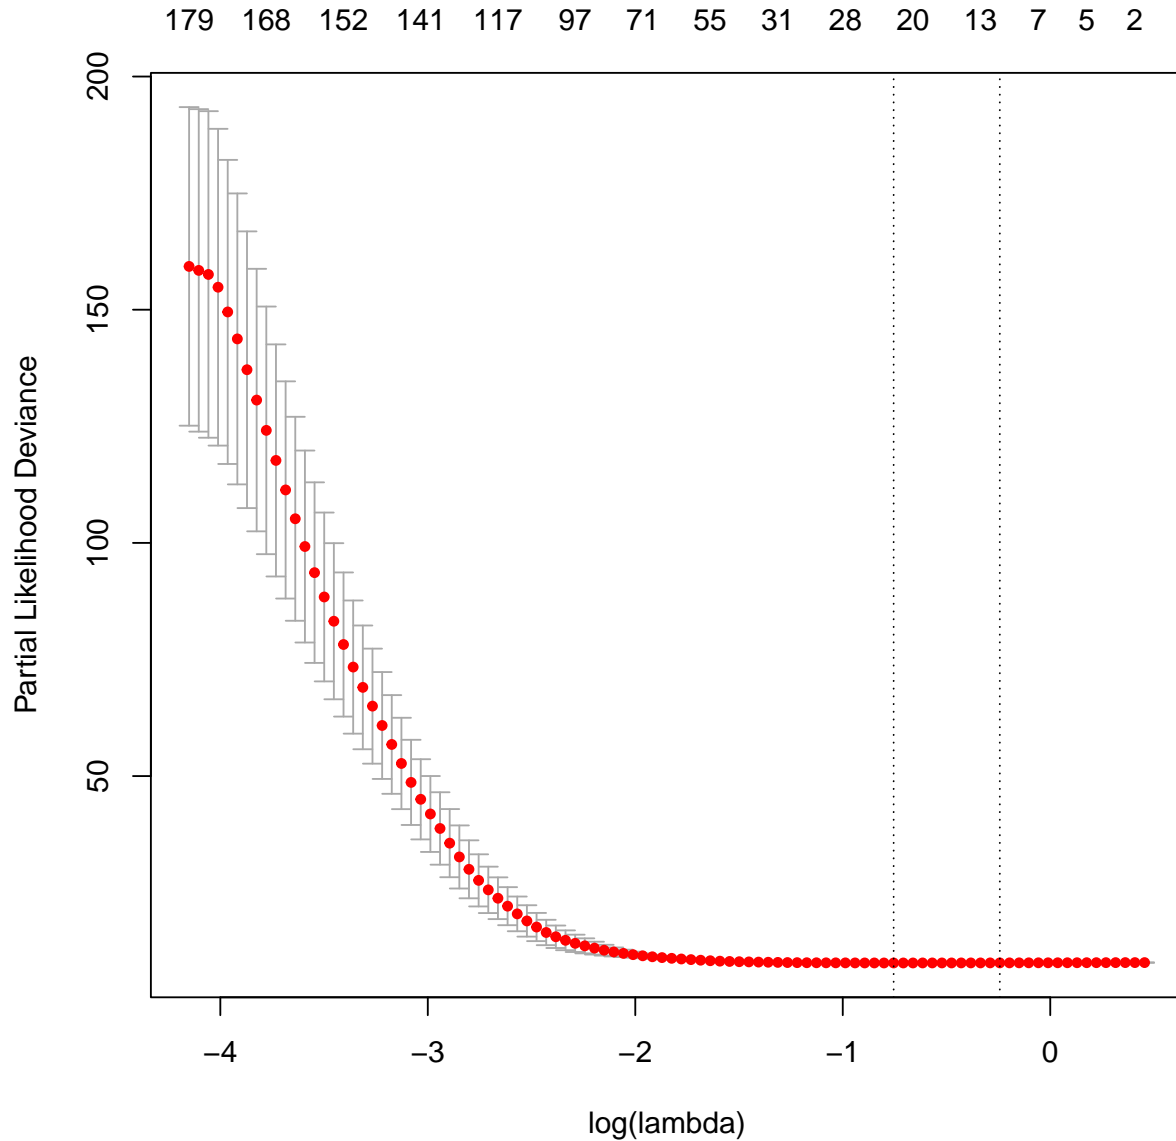

In this plot, the left vertical line shows where the CV-error curve hits its minimum. The right vertical line shows us the most regularized model with CV-error within 1 standard deviation of the minimum. The optimal λ can be obtained:

```
cv.mod$glmnetRes$lambda.min
## [1] 0.4701213
cv.mod$glmnetRes$lambda.1se
## [1] 0.7842097
```

We can check the active covariates (genes) in our model and see their coefficients.

```
coef.min <- coef(cv.mod$glmnetRes, s = "lambda.min")
coef.min
```

```
## 383 x 1 sparse Matrix of class "dgCMatrix"
```

```
##           1
## 7010      .
## 1261      .
## 10209     .
## 22798     .
## 2526      .
## 10965     .
## 1362      .
## 22929    -0.020897935
## 5876      .
## 3265      .
## 8302      .
## 645       .
## 23480     .
## 1311      .
## 25        .
## 4598      .
## 3269      .
## 767       .
## 3385      .
## 80380     .
## 55176     .
## 1819      .
## 3930      .
## 4478      .
## 5617     -0.126328253
## 55341     0.006056988
## 5042      .
## 22800     .
## 3939      .
## 822       .
## 79695     .
## 55540     .
## 5934      .
## 5806      .
## 259230    .
## 51330     .
## 7098      .
## 8513      .
## 5836      .
## 64374     .
## 2184      .
## 988       .
## 5464      .
## 8309      .
## 10451     .
## 3574      .
## 873       .
## 3710      .
## 7314      .
```



```
## 114049 .
## 79723 -0.016504110
## 8030 .
## 1508 .
## 5223 .
## 6696 .
## 1788 .
## 3696 .
## 10552 .
## 5532 .
## 1796 .
## 5599 .
## 51700 .
## 10505 .
## 79132 .
## 3178 .
## 478 .
## 3799 .
## 135 -0.056788179
## 1571 .
## 6908 .
## 23600 .
## 35 .
## 2053 0.014389764
## 2746 -0.011474410
## 4615 .
## 5371 .
## 51744 .
## 36 .
## 3066 .
## 50940 .
## 1398 .
## 7378 .
## 5407 .
## 586 .
## 56288 .
## 4689 .
## 6732 .
## 3280 .
## 3298 .
## 4938 .
## 109 .
## 3576 .
## 7132 .
## 605 .
## 3485 0.065929675
## 3689 .
## 29780 .
## 3588 .
## 200316 .
## 771 .
## 51384 .
## 3375 .
## 4223 .
```

```
## 783 .
## 10846 .
## 4216 .
## 1026 .
## 1528 .
## 5606 .
## 89 .
## 9547 .
## 2213 .
## 8228 .
## 7187 .
## 23283 .
## 2512 .
## 1968 .
## 3460 .
## 928 .
## 8985 .
## 8317 .
## 10683 .
## 26873 .
## 10961 .
## 23560 .
## 51706 .
## 10555 .
## 1593 .
## 815 .
## 3823 .
## 883 .
## 8795 .
## 242 .
## 63917 .
## 8443 .
## 1029 .
## 9601 .
## 6608 .
## 9126 .
## 3363 .
## 635 -0.084546785
## 4825 -0.028206145
## 2979 .
## 2261 .
## 1465 .
## 3597 .
## 2590 .
## 55506 .
## 3613 .
## 56681 .
## 7076 .
## 23049 .
## 79671 .
## 4160 .
## 435 .
## 50613 .
## 5154 .
```

```
## 7991 .
## 1142 .
## 10095 .
## 8526 .
## 8837 .
## 23162 .
## 680 .
## 2876 .
## 2768 .
## 301 .
## 57292 .
## 3805 .
## 3803 .
## 5078 .
## 8027 -0.055209814
## 8878 .
## 467 .
## 3956 .
## 8945 .
## 25956 .
## 2012 .
## 4940 .
## 6579 .
## 6347 .
## 6282 .
## 5982 .
## 706 .
## 134 .
## 9519 .
## 5269 .
## 8737 .
## 130 .
## 5742 .
## 348995 .
## 307 .
## 8031 .
## 8643 .
## 5137 0.047616877
## 79717 .
## 55970 .
## 6251 .
## 10010 0.013500854
## 834 .
## 55746 .
## 9071 .
## 1030 .
## 8667 .
## 4616 .
## 302 .
## 1495 .
## 4035 .
## 2064 .
## 6189 .
## 3958 .
```

```
## 6777 .
## 2235 .
## 5260 .
## 54961 .
## 3646 .
## 3486 .
## 3693 .
## 5937 .
## 4301 .
## 7029 .
## 4982 .
## 55740 .
## 6609 .
## 5957 .
## 6774 .
## 5479 .
## 5799 .
## 4303 .
## 5322 .
## 1948 .
## 5872 .
## 80228 .
## 821 .
## 60489 .
## 1635 .
## 4000 .
## 5395 .
## 2260 .
## 2923 .
## 5832 -0.010516256
## 22925 .
## 833 .
## 3568 .
## 29978 .
## 23590 .
## 4804 .
## 650 -0.008886853
## 1717 .
## 5358 .
## 3381 .
## 9184 .
## 716 .
## 1647 .
## 5327 .
## 64581 .
## 84790 .
## 5158 .
## 6885 .
## 57819 .
## 51056 .
## 6720 .
## 7253 .
## 5329 .
## 11051 .
```

```
## 8717 .
## 1263 .
## 3757 0.067367967
## 4863 .
## 2318 .
## 92815 .
## 2242 .
## 23401 -0.041951307
## 2847 .
## 3556 .
## 7037 .
## 7434 .
## 2107 .
## 22934 .
## 373156 .
## 2254 .
## 132 .
## 27350 .
## 362 .
## 5575 .
## 6929 .
## 55844 .
## 1488 .
## 5025 .
## 2232 .
## 602 .
## 831 .
## 5238 .
## 7417 .
## 8074 .
## 10282 .
## 960 .
## 9104 .
## 1355 .
## 2766 .
## 2246 .
## 3423 0.060113280
## 838 .
## 3665 .
## 4763 .
## 5899 .
## 2792 .
## 27243 .
## 4493 .
## 3842 .
## 221830 .
## 6718 .
## 10130 .
## 2954 0.041359039
## 5795 .
## 648 .
## 5906 .
## 2747 .
## 3691 .
```

```
## 9180 .
## 55742 .
## 3034 .
## 8324 .
## 976 .
## 6156 .
## 6048 .
## 4255 .
## 8454 0.010574130
## 4046 .
## 51013 .
## 4129 .
## 2897 .
## 79728 .
## 6125 .
## 30 .
## 7494 .
## 10652 .
## 2817 .
## 26528 .
## 1643 .
## 5634 .
## 2645 .
## 3821 .
## 654 .
## 51513 .
## 2890 .
## 2331 .
## 5664 .
## 3488 .
## 5715 .
## 5332 .
## 5792 .
## 2014 .
## 761 .
## 10901 .
## 5971 .
## 9337 .
## 4084 .
## 23411 -0.054728602
## 54472 .
## 2100 .
## 6304 .
## 5328 .
## 5728 .
## 1027 .
## 55240 .
## 30833 .
## 4499 0.055507586
## 56895 .
## 3625 .
## 2035 .
## 5334 .
## 3309 .
```

```
## 10105 .
## 10588 .
## 3720 .
## 975 .
## 8453 .
## 2208 .
## 80319 .
## 3783 .
## 56034 .
## 6197 .
```

The selected features and their coefficients can be obtained:

```
nonZeroIdx <- which(coef.min[,1] != 0)
features <- rownames(coef.min)[nonZeroIdx]
features

## [1] "22929" "5617" "55341" "79723" "135" "2053" "2746" "3485" "635" "4825"
## [11] "8027" "5137" "10010" "5832" "650" "3757" "23401" "3423" "2954" "8454"
## [21] "23411" "4499"

features.coef <- coef.min[nonZeroIdx]
names(features.coef) <- features
features.coef

##          22929          5617          55341          79723          135          2053
## -0.020897935 -0.126328253  0.006056988 -0.016504110 -0.056788179  0.014389764
##          2746          3485          635          4825          8027          5137
## -0.011474410  0.065929675 -0.084546785 -0.028206145 -0.055209814  0.047616877
##          10010          5832          650          3757          23401          3423
##  0.013500854 -0.010516256 -0.008886853  0.067367967 -0.041951307  0.060113280
##          2954          8454          23411          4499
##  0.041359039  0.010574130 -0.054728602  0.055507586
```

The fitted RLassoCox model can be used to predict survival risk of new patients:

```
lp <- predict.cvRlassoCox(object = cv.mod, newx = x.test,
                          s = "lambda.min")
lp

##          1
## TCGA-02-0003  0.252281003
## TCGA-02-0011 -0.436949368
## TCGA-02-0014 -0.995169701
## TCGA-02-0024 -0.239595696
## TCGA-02-0055  0.071474306
## TCGA-02-0060 -0.360736704
## TCGA-06-0876 -0.065961334
## TCGA-06-5411  0.100059113
## TCGA-06-6390  0.376513608
## TCGA-19-5956  0.060821492
## TCGA-26-1442 -0.700211388
## TCGA-76-6282  0.155664820
## TCGA-06-6388  0.156024517
## TCGA-06-6700  0.082704758
```

TCGA-26-6173 -0.040156916
TCGA-26-6174 -0.149566729
TCGA-74-6575 0.484281556
TCGA-74-6577 0.525763613
TCGA-74-6578 0.007548998
TCGA-74-6581 0.324888178
TCGA-76-6280 0.754944757
TCGA-76-6286 -0.082245778
TCGA-76-6657 0.524578516
TCGA-76-6662 0.555978661
TCGA-76-6664 -0.292625930
TCGA-06-1084 0.239712644
TCGA-12-1094 -0.103088391
TCGA-12-1096 -0.388725786
TCGA-12-1099 0.051802682
TCGA-14-0736 0.145505972
TCGA-14-0783 -0.108736284
TCGA-14-1452 -0.013442523
TCGA-26-1438 -0.085805469
TCGA-26-1440 0.385229649
TCGA-02-0071 0.292308469
TCGA-02-0075 0.517931268
TCGA-02-0080 -0.732568718
TCGA-02-0083 0.377743827
TCGA-02-0086 0.424971599
TCGA-02-0099 -0.281152373
TCGA-02-0107 0.039249428
TCGA-02-0113 0.171228733
TCGA-02-0116 -0.008497652
TCGA-12-1600 -0.249009548
TCGA-14-1458 -0.425255984
TCGA-14-1821 -0.855506168
TCGA-14-1827 0.234014704
TCGA-27-1833 -0.164585648
TCGA-27-1834 0.099416830
TCGA-28-1757 0.239602225
TCGA-02-2483 -0.625135072
TCGA-02-2485 0.019610409
TCGA-02-2486 0.429028506
TCGA-06-2565 0.039163607
TCGA-06-2566 0.122523143
TCGA-27-1831 0.160742044
TCGA-27-2524 -0.102853286
TCGA-28-1756 -0.722575783
TCGA-32-1982 -0.106181217
TCGA-06-0130 0.086154241
TCGA-06-0141 0.153624876
TCGA-12-3653 0.017825574
TCGA-14-3477 -0.196865367
TCGA-32-2615 0.239068020
TCGA-06-0154 -0.068996804
TCGA-06-0168 -0.086409139
TCGA-06-0184 0.189219979
TCGA-06-0211 0.097159491


```
## TCGA-06-0214 -0.033073256
## TCGA-06-0221 -0.745897535
## TCGA-02-0325 0.547408994
## TCGA-02-0326 0.174854040
## TCGA-02-0338 -0.076475403
## TCGA-02-0432 -0.838758622
## TCGA-02-0451 0.202940730
## TCGA-06-0164 -0.015400069
## TCGA-08-0525 0.386861198
## TCGA-02-0015 -0.230604005
## TCGA-02-0016 0.029175934
## TCGA-02-0068 -0.064594271
## TCGA-02-0070 0.089438349
## TCGA-08-0347 -0.077289033
## TCGA-08-0350 -0.712272488
## TCGA-08-0351 -0.749903263
## TCGA-08-0356 -0.009218560
## TCGA-08-0380 -0.031081622
## TCGA-08-0389 -0.255074540
## TCGA-06-0939 -0.062484467
## TCGA-02-0084 -0.413313653
## TCGA-12-0616 -0.202956066
## TCGA-12-0620 0.002716557
## TCGA-06-5417 -1.003987837
## TCGA-28-5204 1.046083326
## TCGA-28-5213 -0.084996638
## TCGA-28-5215 0.102295777
## TCGA-76-4929 0.255713799
## TCGA-76-4931 0.306492175
## TCGA-76-4934 -0.308837884
## TCGA-76-4935 -0.081979086
## TCGA-06-0216 -0.187663624
## TCGA-06-0747 0.145434937
## TCGA-12-0656 0.098363463
## TCGA-12-0662 0.250645980
## TCGA-12-0688 -0.139330818
## TCGA-12-0780 0.137194654
```

4 SessionInfo()

```
sessionInfo()
```

```
## R version 4.4.1 (2024-06-14)
## Platform: x86_64-pc-linux-gnu
## Running under: Ubuntu 24.04 LTS
##
## Matrix products: default
## BLAS: /usr/lib/x86_64-linux-gnu/openblas-pthread/libblas.so.3
## LAPACK: /usr/lib/x86_64-linux-gnu/openblas-pthread/libopenblas-p-r0.3.26.so; LAPACK version 3.12.0
##
## locale:
## [1] LC_CTYPE=en_US.UTF-8 LC_NUMERIC=C LC_TIME=en_US.UTF-8
```

```

## [4] LC_COLLATE=C          LC_MONETARY=en_US.UTF-8    LC_MESSAGES=en_US.UTF-8
## [7] LC_PAPER=en_US.UTF-8    LC_NAME=C                  LC_ADDRESS=C
## [10] LC_TELEPHONE=C         LC_MEASUREMENT=en_US.UTF-8 LC_IDENTIFICATION=C
##
## time zone: Etc/UTC
## tzcode source: system (glibc)
##
## attached base packages:
## [1] stats      graphics  grDevices  utils      datasets  methods    base
##
## other attached packages:
## [1] RLassoCox_1.13.0 glmnet_4.1-8      Matrix_1.7-0      knitr_1.47
##
## loaded via a namespace (and not attached):
## [1] igraph_2.0.3      codetools_0.2-20 shape_1.4.6.1     xfun_0.45         lattice_0.22-6
## [6] magrittr_2.0.3    splines_4.4.1     maketools_1.3.0  iterators_1.0.14  pkgconfig_2.0.3
## [11] buildtools_1.0.0 lifecycle_1.0.4   cli_3.6.3        foreach_1.5.2     grid_4.4.1
## [16] compiler_4.4.1   highr_0.11        sys_3.4.2        tools_4.4.1       evaluate_0.24.0
## [21] survival_3.7-0   Rcpp_1.0.12       rlang_1.1.4

```

References

- [1] Simon, Noah, Jerome Friedman, Trevor Hastie, and Robert Tibshirani. Regularization Paths for Cox's Proportional Hazards Model via Coordinate Descent. *Journal of Statistical Software*. 2011, 39(5): 1-13.